




XPG BATTLECRUISER FAQ

How to install a 360mm CPU liquid cooler at the top of the XPG BATTLECRUISER chassis.

1. When installing a 360mm CPU liquid cooler, please make sure the bracket is installed in-between the fans and the radiator, as demonstrated in the diagram below.

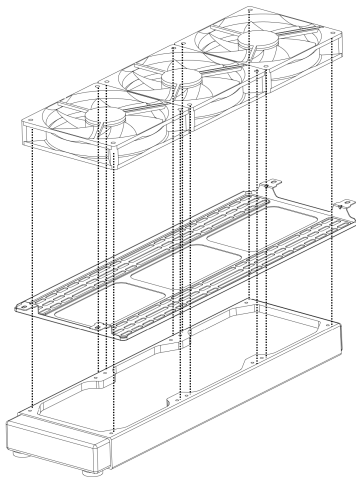

→ Make sure the fans are installed above the bracket.


→ Make sure the bracket is facing upwards (by default).

→ The radiator is installed underneath the bracket.

2. The top bracket of the XPG BATTLECRUISER is modular and removable.

Unscrew the bracket and shift towards the left (glass panel) side, then securely screw the bracket on the chassis.

This ensures the installation of a 360mm radiator will not hinder or obstruct DRAM.

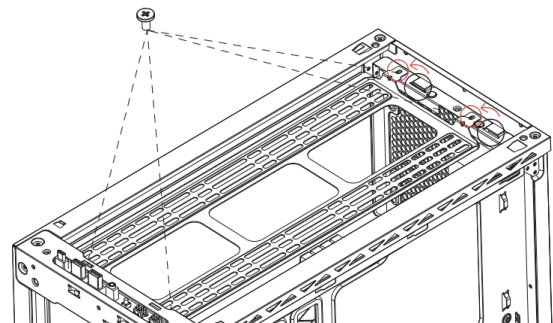

3. The recommended height of DRAM is 45mm.

As shown in the diagram, the modular bracket needs to be shifted towards the glass panel side of the chassis, and installed between the fans and the radiator to ensure DRAM clearance.

